


E型铁芯/E Core

S3U系列/S3U-series

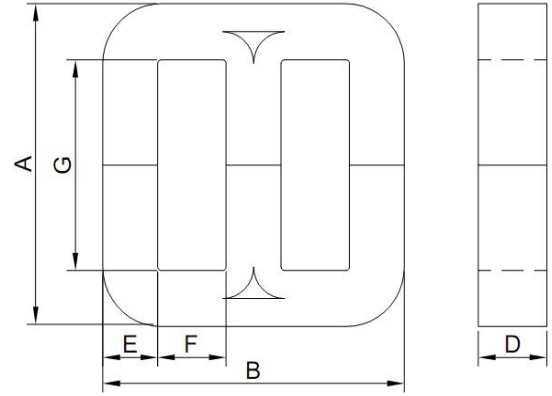

铁芯型号 Code	铁芯尺寸/Dimension (mm)									磁路 长度 Flux path L(cm)	截面积 Cross section k (cm ²)	重量 Weight Kg	额定功率 Approx V.A. 0.3mm/50Hz
	G min	F min	A max	B max	D max Tol		E max Tol		R max				
S3U30a	32.5	10.0	53.7	50.9	10.1	-0.6	9.9	-0.8	1.5		0.86	0.115	7
S3U30b	-	-	-	-	16.1	-	-	-	-		1.41	0.189	15
S3U39a	41.5	13.0	70.9	66.0	13.4	-0.9	12.9	-0.8	1.5		1.51	0.262	20
S3U39b	-	-	-	-	20.4	-	-	-	-		2.36	0.409	25
S3U48a	50.5	16.0	83.9	80.8	16.6	-1.0	15.8	-0.9	1.5		2.32	0.492	30
S3U48b	-	-	-	-	25.6	-	-	-	-		3.67	0.779	40
S3U60a	63	20.0	104.6	100.9	20.6	-1.1	19.8	-0.9	2.0		3.69	0.959	60
S3U60b	-	-	-	-	30.6	-	-	-	-		5.58	1.470	100
S3U75a	78	25.0	129.7	125.7	26.1	-1.1	24.7	-1.0	2.0		5.93	1.820	140
S3U75b	-	-	-	-	41.1	-	-	-	-		9.48	2.930	180
S3U90a	95	30.0	156.8	150.6	30.9	-1.4	29.6	-1.1	3.0		8.41	3.330	270
S3U90b	-	-	-	-	50.9	-	-	-	-		14.11	5.590	450
S3U102a	106	34.0	176.4	171.1	35.4	-1.4	33.7	-1.2	3.0		11.05	4.940	450
S3U102b	-	-	-	-	56.4	-	-	-	-		17.88	8.000	700
S3U114a	118	38.0	196.2	191.0	39.2	-1.7	37.6	-1.3	3.0		13.54	6.780	650
S3U114b	-	-	-	-	63.2	-	-	-	-		22.20	11.100	1000
S3U132a	136	44.0	226.4	220.5	45.2	-1.7	43.4	-1.4	3.0		18.27	10.500	1000
S3U132b	-	-	-	-	71.2	-	-	-	-		29.19	16.800	1800
S3U150a	154	50.0	255.6	249.6	51.2	-1.7	49.4	-1.5	3.0		23.71	15.500	2000
S3U150b	-	-	-	-	76.2	-	-	-	-		35.69	23.400	3000
S3U168a	172	56.0	286	279.6	57	-2.0	55.3	-1.6	3.0		29.54	21.700	3000
S3U168b	-	-	-	-	91	-	-	-	-		47.49	35.100	4000
S3U180a	184	60.0	307.2	301.0	62	-2.0	59.7	-1.8	3.0		34.74	27.400	3500
S3U180b	-	-	-	-	77	-	-	-	-		43.43	34.200	4500
S3U180c	-	-	-	-	92	-	-	-	-		52.11	41.100	5000
S3U210a	214	70.0	357.2	350.8	71.7	-2.2	69.6	-2.0	3.0		46.98	43.100	6000
S3U210b	-	-	-	-	101.7	-	-	-	-		67.26	61.700	8000
S3U210c	-	-	-	-	131.7	-	-	-	-		87.54	80.400	10000